

# B.

## FR7 Underlay


### Extended Specifications

Use Classification: (EN 1307) (BS 5808:1991 / BS 14499:2015)	Heavy Contract / Commercial Use
Product Description:	Yellow polyethylene/polyethylene with reinforcing mesh
Recycled Content:	Yes - 95% pre-consumer recycled material
Recyclable:	Yes - 100% at end of underlays useful life
Total Thickness: (ISO 8543)	7.0 (mm)   0.258 (in)
Total Mass: (ISO 8543)	±1015 (g/m <sup>2</sup> )   30 (oz/yd <sup>2</sup> )
Roll Width:	1.37 (m)   53.93 (in)
Roll Length:	11 (m)   433.07 (in)
Fire Classification: (EN 13501-1)	Bfl-s1 (EN ISO 9239-1 & 11925-2 rated to EN13501-1)
CFD (Compression Force Deflection): (ASTM D3676-13)	0.9 PSI @ 25% deflection
Odour:	No objectionable odour
Thermal Resistance: (BS 4745)	1.99 togs ‡
Impact Sound Reduction:	34dB (BS EN 140-8 1998 and BS EN ISO 717-2)
Indoor Air Quality:	Meets or exceeds the industry standard for indoor air quality - CRI Green Label
VOC Emissions: (ASTM D5116) (GBCSA/ GBCA & CRI Specifications)	Meets low VOC emission criteria (US CRI Green Label-GLP051 Cat CC2 PU)

\*\* Weighted Average



# B.

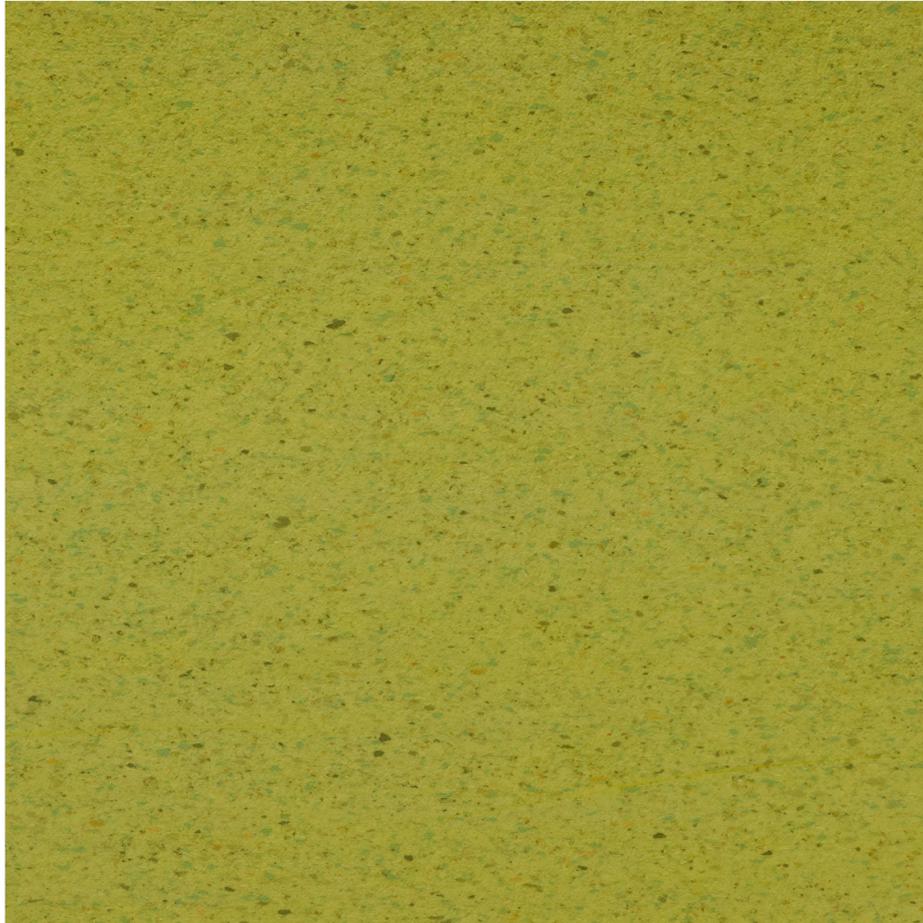

## FR7 Underlay



### Bill of Quantities

- Belgotex FR7 UNDERLAY 11 x 1.37m width Heavy Contract/ Commercial use 7.0mm underlay is manufactured from polyethylene.

\*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.